



ABOUT KELYLANDS

NINGBO KELYLANDS CAR ACCESSORY CO., LTD is an integrated enterprise with R&D, manufacture and service. We have technology development center, injection moulding department, sheet metal construction department, surface processing department, wiringharness department. Our main products include thermoelectric mini fridges and coolers. With a wider range, good quality, reasonable prices and stylish products are extensively used in car decoration and other industries. Our products are widely recognized and trusted by users and can meet continuously developing economic and social needs. Our company controls the quality of product and consumption strictly. We also improve the quality of employees and enterprise continuously.

Our factory has been certified by BSCI All of our goods gain CCC、CB、CE、GS、RoHS、ETL and LFGB certificates. There are more than 20 patents from us approved each year. Our products are sold in Britain, France, Germany, Italy, Spain, America, Brazil, Korea, Japan and well appreciated by the purchasers. The total staff number in our factory is more than 100. Each year the sales can reach up to 10 million dollars. We always stick to our quality policy of "giving 100% satisfaction to our clients, achieving 100% our promises". Our goal: To be the best one in the area of mini fridge! To be one of the leaders in the future!

We welcome new and old customers from all over the world to contact us for future business relationship and achieve mutual success!

NEW

COSMETIC FRIDGE

MFA-12L-B

THERMOELECTRIC COOLER

1. Power: AC 100V-240V(with an adapter)
2. Volume:12 Litre
- 3.Power consumption: 45W±10%
- 4.Cooling: 12°C -18°C below ambient temperature 25°C
5. Insulation: PU foam
- 6.Inside led light and light on the door surface
- 7.Tempered glass door surface

Outer Carton: 320*305*500(mm) Item size: 270x250x425(mm)

Color box: 310*293*485(mm) N.W./G.W(KGS):4.8/6.5KG

PACKING:1PC/Inner BOX 1PC/CTN

QTY/20*/40*/40*HC:570/1200 /1350



NEW

COSMETIC FRIDGE

MFA-12L-C

THERMOELECTRIC COOLER

1. Power: AC 100V-240V(with an adapter)
2. Volume:12 Litre
- 3.Power consumption: 45W±10%
- 4.Cooling: 12°C -18°C below ambient temperature 25°C
5. Insulation: PU foam
6. Double Doors
7. Digital display and temperature control panel

Outer Carton: 320x305x500(mm) Item size: 270x250x425(mm)

Color box: 310x293x485(mm) N.W./G.W(KGS):4.8/6.5KG

PACKING:1PC/Inner BOX 1PC/CTN

QTY/20*/40*/40*HC:570/1200 /1350



NEW

COSMETIC FRIDGE

MFA-5L-F

THERMOELECTRIC COOLER


1. Power: AC 100V-240V
2. Volume: 5 Litre
- 3.Power consumption: 38W±10%
- 4.Cooling: Intelligent constant temperature 10 ° /18 °
- 5.Insulation:Pu foam
- 6.Equipped with long life brushless motor (30,000 hours)

Outer Carton: 380*270*370(mm) Item size: 309*217*328(mm)

Color box: 368*255*353(mm) N.W./G.W(KGS):4.0/5.4KG

PACKING:1PC/Inner BOX 1PC/CTN


QTY/20*/40*/40*HC:700/1480/1760

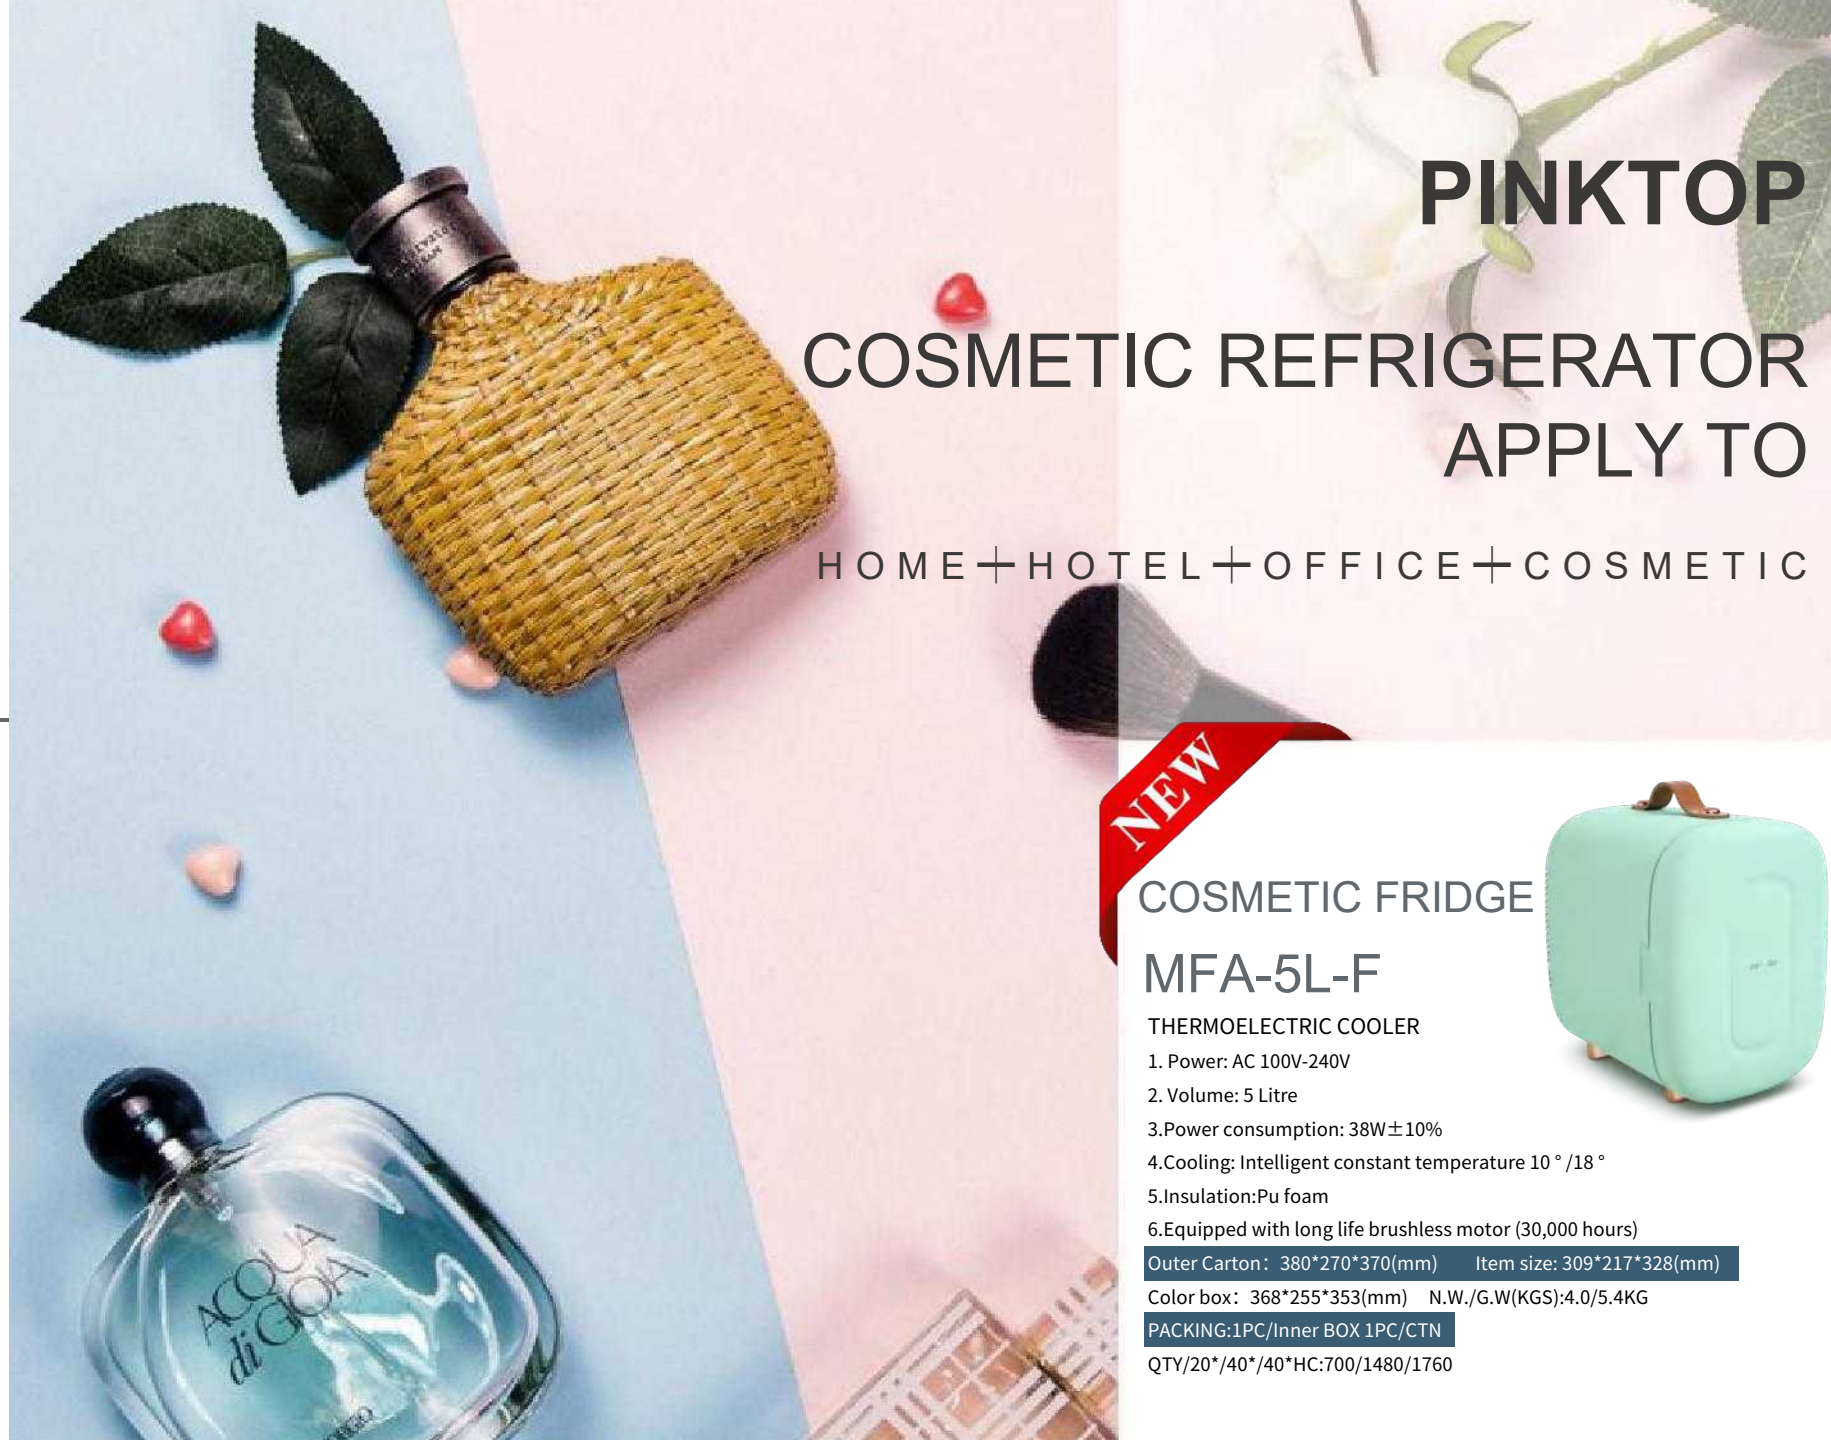


PINKTOP

COSMETIC REFRIGERATOR APPLY TO

HOME+HOTEL+OFFICE+COSMETIC

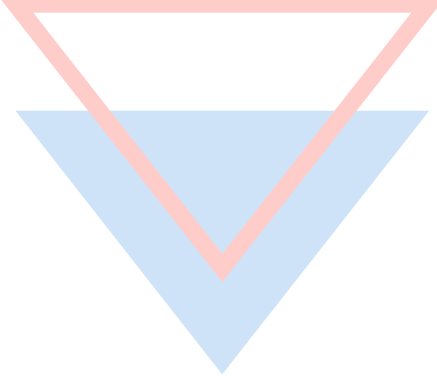

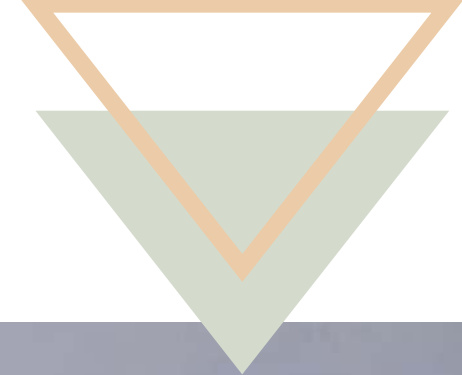



NEW

THERMOELECTRIC COOLER

CBA-6L-I



- 1.Power:AC 100-240V (with an adapter)
- 2.Volume:6 Litre
- 3.Power consumption:20W±10%
- 4.Cooling 15-18°C below ambient temp.(25°C)
- 5.insulation:high density EPS
- 6.Led vanity mirror surface

Outer Size:356*243*194(mm) Inner Size:260*161*138(mm)

Inner Size:(mm) Inner Box Size:(mm)

MINI FRIDGE

CBA-9L



THERMOELECTRIC COOLER AND WARMER

- 1.Power: AC 100~240V with an adapter
- 2.Volume: 9 Litre
- 3.Power consumption20W±10%
- 4.Cooling 14-18°C below ambient temp.(25°C)
- 5. Solid polyurethane foam (PU foam)

Outer Carton: 320*305*500(mm) Outer Size:380*290*220(mm)

Inner Size:320*150*170(mm) Inner Box Size:420*350*260(mm)

PACKING:1PC/Inner BOX 1PC/CTN

QTY/20*/40*/40*HC(PCS):650/1300/1490

N.W/G.W(KGS):4.7/5.5

COSMETIC REFRIGERATOR

COSMETIC



MINI FRIDGE

MFA-10L-I

THERMOELECTRIC COOLER AND WARMER

- 1.Power:DC 12V,AC 100V-240V
- 2.Volume:10 Litre
- 3.Power consumption:48W±10%
- 4.Cooling:16-20°C below ambient temperature(25°C)
- 5.Heating:50-65°C by thermostat
- 6.Insulation:High density EPS
- 7.Equipped with long life brushless motor(30,000 hours)
- 8.Led vanity mirror surface

Outer Outer : 245*290*340(mm) Inner Size:182*173*277(mm)

Inner Box Size:326*280*379(mm) Carton Size:575*340*395(mm)

PACKING:1PC/GIFTBOX 2PCS/CTN

QTY/20*/40*/40*HC(PCS):760/1500/1800

N.W/G.W(KGS):7.1/9.8



MINI FRIDGE

APPLY TO

CAR、HOME、HOTEL、BAR、OFFICE、COSMETIC



MINI FRIDGE MFA-0.5L

PRODUCT NAME AND TECHNICAL FEATURES

THE THERMOELECTRIC COOLER AND WARMER

- 1.Power:DC 5V with USB cord AV 100V-240V with an adapter
- 2.Volume:0.5 Litre
- 3.Power consumption:48W±10%
- 4.Cooling:12-16°C below ambient temperature
- 5.insulation:high density EPS
- 6.Equipped with long life brushless motor(30.000 hours)

Outer Size:115*115*185(mm) Inner Size:65*65*105(mm)

Inner Box Size: 140*140*215(mm) Carton Size:730*300*450(mm)

PACKING:1PC/Inner Box 20PCS/CTN

QTY/20*/40*HC(PCS):5800/12000/14000

N.W/G.W.(KGS):8/10



MINI FRIDGE MFA-2.5L

PRODUCT NAME AND TECHNICAL FEATURES

THE THERMOELECTRIC COOLER AND WARMER

- 1.Power:AC 100~240V
- 2.Volume:2.5 Litre
- 3.Power consumption:48W±10%
- 4.Cooling:18~22°C below ambient temp.(25°C)
- 5.insulation:high density EPS
- 7.Equipped with long life brushless motor(30.000 hours)
- 8.Tempered glass door surface
- 9.digital temperature display and control temp

Outer Size:247*155.8*233.8(mm) Inner Size:199.8*109.8*107(mm)

InnerBox Size:263*256*172(mm) CartonSize:511*359*241(mm)

PACKING:1PC/Inner BOX 4PCS/CTN

QTY/20*/40*/40*HC(PCS):2100/4300/5000

N.W/G.W.(KGS):10/12



MINI FRIDGE MFA-I-01

PRODUCT NAME AND TECHNICAL FEATURES

THERMOELECTRIC INSULATED CASE

- 1.Power:DC 5V,USB Cord AC 100-240V with AC Plug
- 2.2-18°C set temperature
- 3.Digital Display and Auto Set
- 4.Capacity:6 insulin
- 5.8Hours Working with full battery
- 6.Rechargeable Battery: LG 3350MAH*3

Outer Size:240*100*110(mm) Inner Size:200*57*30(mm)

Inner Box Size:330*130*155(mm) Carton Size:350*290*660(mm)

PACKING:1PC/Inner BOX 9PCS/CTN

QTY/20*/40*/40*HC(PCS):3700/7700/9000

N.W/G.W.(KGS):10.4/14.4



MINI FRIDGE MFA-4L

PRODUCT NAME AND TECHNICAL FEATURES

THERMOELECTRIC COOLER AND WARMER

- 1.Power: AC 220V, DC 12V
- 2.Volume:4 Litre
- 3.Power consumption:35W±10%
- 4.Cooling affect at 25degree
- 5.insulation:high density EPS
6. Low working noise, better for using in bedroom when customer is resting

Outer Size:282*177*250(mm) Inner Size:202*135*143(mm)



MINI FRIDGE

MFP-5L

PRODUCT NAME AND TECHNICAL FEATURES

THE THERMOELECTRIC COOLER AND WARMER

- 1.Power:DC 12V.ac 100V-240V
- 2.Volume:4 Litre
- 3.Power consumption:35±10%
- 4.Cooling:16-20°C below ambient temperature(25°C)
- 5.Heating: 50-65°C by thermostat
- 6.insulation:high density EPS
- 7.Equipped with long life brushless motor(30,000 hours)

Outer Size:190*270*275(mm) Inner Size:135*140*200(mm)

Inner Box Size:273*194*290(mm) CartonSize:405*290*595(mm)

PACKING:1PC/GIFTBOX 4PCS/CTN

QTY/20*/40*/40*HC(PCS):1500/3200/3900

N.W/G.W.(KGS):8.0/10.0



MINI FRIDGE

MFA-5L

PRODUCT NAME AND TECHNICAL FEATURES

THERMOELECTRIC COOLER AND WARMER

- 1.Power:DC 12V.AC 100V-240V
- 2.Volume:4 Litre
- 3.Power consumption:35±10%
- 4.Cooling:16-20°C below ambient temperature(25°C)
- 5.Heating:50-65°C by thermostat
- 6.Insulation:High density EPS
- 7.Equipped with long life brushless motor(30,000 hours)

Outer Size:190*270*275(mm) Inner Size:135*140*200(mm)

Inner Box Size:273*194*290(mm) CartonSize:405*290*595(mm)

PACKING:1PC/GIFTBOX 4PCS/CTN

QTY/20*/40*/40*HC(PCS):1500/3200/3900

N.W/G.W.(KGS):8.0/10.0



MINI FRIDGE

MFA-5L-A

PRODUCT NAME AND TECHNICAL FEATURES

THE THERMOELECTRIC COOLER AND WARMER

- 1.Power:DC 12V.AC 100V-240V
- 2.Volume:4 Litre
- 3.Power consumption:35±10%
- 4.Cooling:16-20°C below ambient temperature(25°C)
- 5.Heating:50-65°C by thermostat
- 6.Insulation:High density EPS
- 7.Equipped with long life brushless motor(30,000 hours)
- 8.Tempered glass door surface

Outer Size:190*270*275(mm) Inner Size:135*140*200(mm)

Inner Box Size:273*194*290(mm) CartonSize:405*290*595(mm)

PACKING:1PC/GIFTBOX 4PCS/CTN

QTY/20*/40*/40*HC(PCS):1500/3200/3900

N.W/G.W.(KGS):8.0/10.0



MINI FRIDGE

MFA-5L-B

PRODUCT NAME AND TECHNICAL FEATURES

THE THERMOELECTRIC COOLER AND WARMER

- 1.Power:DC 12V.AC 100V-240V
- 2.Volume:4 Litre
- 3.Power consumption:35±10%
- 4.Cooling:16-20°C below ambient temperature(25°C)
- 5.Heating:50-65°C by thermostat
- 6.Insulation:High density EPS
- 7.Equipped with long life brushless motor(30,000 hours)

Outer Size:190*270*275(mm) Inner Size:135*140*200(mm)

Inner Box Size:273*194*290(mm) CartonSize:405*290*595(mm)

PACKING:1PC/GIFTBOX 4PCS/CTN

QTY/20*/40*/40*HC(PCS):1500/3200/3900

N.W/G.W.(KGS):8.0/10.0



MINI FRIDGE

MFA-6L

PRODUCT NAME AND TECHNICAL FEATURES

THE THERMOELECTRIC COOLER AND WARMER

- 1.Power:DC 12V.AC 100V-240V
- 2.Volume:6 Litre
- 3.Power consumption:48W±10%
- 4.Cooling:16-20°C below ambient temperature(25°C)
- 5.Heating:50-65°C by thermostat
- 6.Insulation:High density EPS
- 7.Equipped with long life brushless motor(30,000 hours)
- 8.Tempered glass door surface

Outer Size:208*275*303(mm) Inner Size:140*148*240(mm)

Inner Box Size:315*260*350(mm) Carton Size:540*330*720(mm)

PACKING:1PC/GIFTBOX 4PCS/CTN

QTY/20*/40*/40*HC(PCS):850/1750/2050

N.W/G.W.(KGS):11/15



MINI FRIDGE

MFP- 6L-A

PRODUCT NAME AND TECHNICAL FEATURES

THE THERMOELECTRIC COOLER AND WARMER

- 1.Power:DC 12V.AC 100V-240V
- 2.Volume:6 Litre
- 3.Power consumption:48W±10%
- 4.Cooling:12-16°C below ambient temperature
- 5.Insulation:High density EPS
- 6.Equipped with long life brushless motor(30,000 hours)

Outer Size:190*248*322(mm) Inner Size:145*135*253(mm)

Inner:Box Size:315*260*350(mm) Carton Size:540*330*720(mm)

PACKING:1PC/BROWN BOX 4PCS/CTN

QTY/20*/40*/40*HC(PCS):850/1750/2050

N.W/G.W.(KGS):11/15



THERMOELECTRIC COOLER

CBA-6L

PRODUCT NAME AND TECHNICAL FEATURES

- 1.ower:AC 100-240V (Adapter)
- 2.Volume:6 Litre
- 3.Power consumption:20W±10%
- 4.Cooling 15-18°C below ambient temp.(25°C)
- 5.insulation:high density EPS

Outer Size:193*237*340(mm) Inner Size:138*159*235(mm)

Inner Box Size:369*325*222(mm) Carton Size:520*380*465(mm)

PACKING:1PC/GIFTBOX 4PCS/CTN

QTY/20*/40*/40*HC(PCS):1100/2400/2700

N.W/G.W.(KGS):7/9.45



THERMOELECTRIC COOLER

CBA-6L-A

PRODUCT NAME AND TECHNICAL FEATURES

- 1.ower:AC 100-240V (Adaptor)
- 2.Volume:6 Litre
- 3.Power consumption:20W±10%
- 4.Cooling 15-18°C below ambient temp.(25°C)
- 5.insulation:high density EPS

Outer Size:193*237*340(mm) Inner Size:138*159*235(mm)

Inner Box Size:369*325*222(mm) Carton Size:520*380*465(mm)

PACKING:1PC/GIFTBOX 4PCS/CTN

QTY/20*/40*/40*HC(PCS):1100/2400/2700

N.W/G.W.(KGS):7/9.45



MINI FRIDGE

MFA-9L

PRODUCT NAME AND TECHNICAL FEATURES

THE THERMOELECTRIC COOLER AND WARMER

- 1.Power:DC 12V and AC 100V-240V
- 2.Volume:9 Litre
- 3.Power consumption:50W±10%
- 4.Cooling:16-20°C below ambient temperature(25°C)
- 5.Heating:50-65°C by thermostat
- 6.Insulation:High density EPS
- 7.Equipped with long life brushless motor(30,000 hours)

Size:266*264*335(mm) Inner Size:200*142*250(mm)

Inner Box Size:296*298*358(mm) Carton Size:620*620*380(mm)

PACKING:1PC/GIFTBOX 4PCS/CTN

QTY/20*/40*/40*HC(PCS):760*1600*1900

N.W/G.W(KGS):10.6/15.0



MINI FRIDGE

MFA-10L

PRODUCT NAME AND TECHNICAL FEATURES

THE THERMOELECTRIC COOLER AND WARMER

- 1.Power:DC 12V and AC 100V-240V
- 2.Volume:10 Litre
- 3.Power consumption:50W±10%
- 4.Cooling:16-20°C below ambient temperature(25°C)
- 5.Heating:50-65°C by thermostat
- 6.Insulation:High density EPS
- 7.Equipped with long life brushless motor(30,000 hours)

Outer Size:240*290*340(mm) Inner Size:185*170*280(mm)

Inner Box Size:326*280*379(mm) Carton Size:575*340*395(mm)

PACKING:1PC/GIFTBOX 2PCS/CTN

QTY/20*/40*/40*HC(PCS):760/1500/1720

N.W/G.W(KGS):7.0/9.0



MINI FRIDGE

MFA-10L-C

PRODUCT NAME AND TECHNICAL FEATURES

THERMOELECTRIC COOLER AND WARMER

- 1.Power:DC 12V,AC 100V-240V
- 2.Volume:10 Litre
- 3.Power consumption:50W±10%
- 4.Cooling:16-20°C below ambient temperature(25°C)
- 5.Heating:50-65°C by thermostat
- 6.Insulation:High density EPS
- 7.Equipped with long life brushless motor(30,000 hours)
- 8.Tempered glass door surface

Outer Size:245*290*340(mm) Inner Size:182*173*277(mm)

Inner Box Size:326*280*379(mm) Carton Size:575*340*395(mm)

PACKING:1PC/GIFTBOX 2PCS/CTN

QTY/20*/40*/40*HC(PCS):760/1500/1720

N.W/G.W(KGS):7.5/9.5



MINI FRIDGE

MFA-14L

PRODUCT NAME AND TECHNICAL FEATURES

THE THERMOELECTRIC COOLER AND WARMER

- 1.Power:DC 12V and AC 100V-240V
- 2.Volume:12.8 Litre
- 3.Power consumption:50W±10%
- 4.Cooling:16-20°C below ambient temperature(25°C)
- 5.Heating:50-65°C by thermostat
- 6.Insulation:High density EPS
- 7.Equipped with long life brushless motor(30,000 hours)

Size:281*352*363(mm) Inner Size:217*225*277(mm)

Inner Box Size:321*392*403mm Carton Size:650*415*420(mm)

PACKING:1PC/GIFTBOX 2PCS/CTN

QTY/20*/40*/40*HC(PCS):550/1050/1200

N.W/G.W(KGS):12.0/13.0



MINI FRIDGE MFA-15L

PRODUCT NAME AND TECHNICAL FEATURES

THE RMOELECTRIC COOLER AND WARMER(Single cooling)

- 1.Power:DC 12V and AC 100V-240V
- 2.Volume:15 Litre
- 3.Power consumption:50W±10%
- 4.Cooling:16-20°C below ambient temperature(25°C)
- 5.Heating:50-65°C by thermostat
- 6.Solid polyurethane foam(PU foam)
- 7.Equipped with long life brushless motor(30,000 hours)

Outer Size:270*325*385(mm) Inner Size:205*205*320(mm)

InnerBox Size:394*324*445(mm) Carton Size:668*410*475(mm)

PACKING:1PC/GIFTBOX 2PCS/CTN

QTY/20*/40*/40*HC(PCS):450/1000/1100

N.W/G.W(KGS):9.5/12.5



MINI FRIDGE MFA-15L-A

PRODUCT NAME AND TECHNICAL FEATURES

THE RMOELECTRIC COOLER AND WARMER(Single cooling)

- 1.Power:DC 12V,AC 100V-240V
- 2.Volume:15 Litre
- 3.Power consumption:50W±10%
- 4.Cooling:16-20°C below ambient temperature(25°C)
- 5.Heating:50-65°C by thermostat
- 6.Solid polyurethane foam(PU foam)
- 7.Equipped with long life brushless motor(30,000 hours)
- 8.Tempered glass door surface

Outer Outer Size:269*332*380(mm) Inner Size:205*205*320(mm)

Inner Box Size:394*324*445(mm) Carton Size:668*410*475(mm)

PACKING:1PC/GIFTBOX 2PCS/CTN

QTY/20*/40*/40*HC(PCS):450/1000/1100

N.W/G.W(KGS):9.6/12.8



MINI FRIDGE MFA-15L-M

PRODUCT NAME AND TECHNICAL FEATURES

THE RMOELECTRIC COOLER AND WARMER(Dual cooling)

- 1.Power:DC 12V,AC 100V-240V
- 2.Volume:15 Litre
- 3.Power consumption:71W±10%
- 4.Cooling:25-30°C below ambient temperature(25°C)
- 5.Heating:50-65°C by thermostat
- 6.Solid polyurethane foam(PU foam)
- 7.Equipped with long life brushless motor(30,000 hours)
- 8.Tempered glass door surface

Outer Size:269*332*380(mm) Inner Size:205*205*320(mm)

Inner Box Size:394*324*445(mm) Carton Size:668*410*475(mm)

PACKING:1PC/GIFTBOX 2PCS/CTN

QTY/20*/40*/40*HC(PCS):450/1000/1100

N.W/G.W(KGS):10/13.5



MINI FRIDGE MFA-15L-L

PRODUCT NAME AND TECHNICAL FEATURES

THE RMOELECTRIC COOLER AND WARMER(Dual cooling)

- 1.Power:DC 12V and AC 100V-240V
- 2.Volume:15 Litre
- 3.Power consumption:71W±10%
- 4.Cooling:26-30°C below ambient temperature(25°C)
- 5.Heating:50-65°C by thermostat
- 6.Solid polyurethane foam(PU FOAM)
- 7.Digital temperature display and control temp(25°C) panel
- 8.Equipped with long life brushless motor(30,000 hours)

Outer Size:270*325*385(mm) Inner Size:205*205*320(mm)

InnerBox Size:394*324*445(mm) Carton Size:668*410*475(mm)

PACKING:1PC/GIFTBOX 2PCS/CTN

QTY/20*/40*/40*HC(PCS):450/1000/1100

N.W/G.W(KGS):9.8/13



MINI FRIDGE

MFA-20L-F

PRODUCT NAME AND TECHNICAL FEATURES

THE RMOELECTRIC COOLER AND WARMER(Dual cooling)

- 1.Power:DC 12V,AC 100V-240V
- 2.Volume:20 Litre
- 3.Power consumption:71W±10%
- 4.Cooling:26-30°C below ambient temperature(25°C)
- 5.Heating:50-65°C by thermostat
- 6.Solid polyurethane foam(PU foam)
- 7.Equipped with long life brushless motor(30,000 hours)
- 8.Tempered glass door surface
- 9.Digital temperature display and control temp pannel

Outer Size:285*350*415(mm) Inner Size:225*230*345(mm)

Inner Box Size:415*365*495mm Carton Size:750*435*515(mm)

PACKING:1PC/GIFTBOX 2PCS/CTN

QTY/20*/40*/40*HC(PCS):400/800/1000

N.W/G.W(KGS):12/16



MINI FRIDGE

MFA-20L-I

PRODUCT NAME AND TECHNICAL FEATURES

THE RMOELECTRIC COOLER AND WARMER(Dual cooling)

- 1.Power:DC 12V,AC 100V-240V
- 2.Volume:20 Litre
- 3.Power consumption:71W±10%
- 4.Cooling:26-30°C below ambient temperature(25°C)
- 5.Heating:50-65°C by thermostat
- 6.Solid polyurethane foam(PU foam)
- 7.Equipped with long life brushless motor(30,000 hours)
- 8.Digital temperature display and control temp pannel

Outer Size:285*350*415(mm) Inner Size:225*230*345(mm)

InnerBox Size:415*365*495mm Carton Size:750*435*515(mm)

PACKING:1PC/GIFTBOX 2PCS/CTN

QTY/20*/40*/40*HC(PCS):400/800/1000

N.W/G.W(KGS):11/15



MINI FRIDGE

MFA-26L-B

PRODUCT NAME AND TECHNICAL FEATURES

THE RMOELECTRIC COOLER AND WARMER(Dual cooling)

- 1.Power:DC 12V,AC 100V-240V
- 2.Volume:25 Litre
- 3.Power consumption:71W±10%
- 4.Cooling:26-30°C below ambient temperature(25°C)
- 5.Heating:50-65°C by thermostat
- 6.Solid polyurethane foam(PU foam)
- 7.Equipped with long life brushless motor(30,000 hours)
- 8.Tempered glass door surface
- 9.Digital temperature display and control temp pannel

Outer Size:333*375*513(mm) Inner Size:253*233*419(mm)

Inner Box Size:420*400*585 (mm) Carton Size:430*410*595(mm)

PACKING:1PC/GIFTBOX 1PCS/CTN

QTY/20*/40*/40*HC(PCS):310/570/660

N.W/G.W(KGS):7.5/8.5



MINI FRIDGE

MFA-28L-A

PRODUCT NAME AND TECHNICAL FEATURES

THE RMOELECTRIC COOLER AND WARMER(Dual cooling)

- 1.Power:DC 12V and AC 100V-240V
- 2.Power consumption:71W±10%
- 3.Volume:25 Litre
- 4.Heating:50-65°C by thermostat
- 5.Cooling:26-30°C below ambient temperature(25°C)
- 6.Insulation:High density EPS
- 7.Equipped with long life brushless motor(30,000 hours)

Outer Size:270*325*385(mm) Inner Size:205*205*320(mm)

InnerBox Size:405*375*555 (mm) Carton Size:410*385*565(mm)

PACKING:1PC/GIFTBOX 1PCS/CTN

N.W/G.W(KGS):6.5/7.5
QTY/20*/40*/40*HC(PCS):320/670/780



CAMPING COOLER BOX

APPLY TO

CAR, OUTDOOR, CAMPING, FAMILY PARTY, FISHING, CAMPING



COOLER BOX

CBP-8L

PRODUCT NAME AND TECHNICAL FEATURES

THERMOELECTRIC COOLER AND WARMER

- 1.Power:DC 12V,AC 100V-240V
- 2.Volume:8 Litre
- 3.Power consumption:48W±10%
- 4.Cooling:20°C below ambient temperature(25°C)
- 5.Heating:50-65°C by thermostat
- 6.Insulation:High density EPS
- 7.With USB5V input and output
- 8.Equipped with long life brushless motor(30,000 hours)

Outer Size:195*390*300(mm) Inner Size:140*205*245(mm)

Inner Box Size:410*235*325mm Carton Size:490*425*670(mm)

PACKING:1PC/GIFTBOX 4PCS/CTN

QTY/20*/40*/40*HC(PCS):800/1600/1900

N.W/G.W(KGS):10/11



COOLER BOX

CBP-18L

PRODUCT NAME AND TECHNICAL FEATURES

THERMOELECTRIC COOLER AND WARMER

- 1.Power:DC 12V,AC 100V-240V
- 2.Volume:18 Litre
- 3.Power consumption:60W±10%
- 4.Cooling:26-30°C below ambient temperature(25°C)
- 5.Heating:50-65°C by thermostat
- 6.Insulation:PU Foam
- 7.Equipped with long life brushless motor(30,000 hours)
- 8.Digital display with control panel

Outer Size:465*320*335(mm) Inner Size:385*190*265(mm)

InnerBox Size:488*340*378mm Carton Size:503*355*393(mm)

PACKING:1PC/GIFTBOX 1PCS/CTN

QTY/20*/40*/40*HC(PCS):421/900/1020

N.W/G.W(KGS):5.4/7



COOLER BOX

CBP-10L-A

PRODUCT NAME AND TECHNICAL FEATURES

THERMOELECTRIC COOLER AND WARMER

- 1.Power:DC 12V,AC 100V-240V
- 2.Volume:10 Litre
- 3.Power consumption:48W±10%
- 4.Cooling:16-20°C below ambient temperature(25°C)
- 5.Heating:50-65°C by thermostat
- 6.Insulation:PU Foam
- 7.Equipped with long life brushless motor(30,000 hours)
- 8.5V out put for charging phone

Outer Size:423*220*295(mm) Inner Size:280*150*235(mm)

Inner Box Size:478*256*355mm Carton Size:540*495*370(mm)

PACKING:1PC/COLOR BOX 2PCS/CTN

QTY/20*/40*/40*HC(PCS):600/1200/1350

N.W/G.W(KGS):6/7.5



COOLER BOX

CBP-12L

PRODUCT NAME AND TECHNICAL FEATURES

THERMOELECTRIC COOLER AND WARMER

- 1.Power:DC 12V,AC 100V-240V
- 2.Volume:12 Litre
- 3.Power consumption:50W±10%
- 4.Cooling:18-20°C below ambient temperature(25°C)
- 5.Heating:50-65°C by thermostat
- 6.Insulation:PU Foam
- 7.Equipped with long life brushless motor(30,000 hours)
- 8.Digital display,5V out put for charging phone

Outer Size:495*257*256(mm) Inner Size:333*197*178(mm)

Inner Box Size:530*300*300mm Carton Size:620*545*320(mm)

PACKING:1PC/COLOR BOX 2PCS/CTN

QTY/20*/40*/40*HC(PCS):500/1030/1200

N.W/G.W(KGS):9.5/10



COOLER BOX CBP-22L

PRODUCT NAME AND TECHNICAL FEATURES

THERMOELECTRIC COOLER AND WARMER(Double Cooling)

- 1.Power:DC 12V-24V,AC 100V-240V
- 2.Volume:22 Litre
- 3.Power consumption:60W±10%
- 4.Cooling:26-30°C below ambient temperature(25°C)
- 5.Heating:50-65°C by thermostat
- 6.Insulation:PU Foam
- 7.Equipped with long life brushless motor(30,000 hours)
- 8.Digital display,5V out put for charging phone

Outer Size:520*280*350(mm) Inner Size:345*212*290(mm)

Inner Box Size:566*325*410mm Carton Size:580*340*425(mm)

PACKING:1PC/GIFTBOX 1PCS/CTN

QTY/20*/40*/40*HC(PCS):300/680 /800

N.W/G.W(KGS):5/6



COOLER BOX CBP-24L-B

PRODUCT NAME AND TECHNICAL FEATURES

THERMOELECTRIC COOLER AND WARMER

- 1.Power:DC 12V,AC 100V-240V
- 2.Volume:24 Litre
- 3.Power consumption:60W±10%
- 4.Cooling:26-30°C below ambient temperature(25°C)
- 5.Heating:50-65°C by thermostat
- 6.Insulation:PU Foam
- 7.Equipped with long life brushless motor(30,000 hours)
- 8.Digital display,5V out put for charging phone

Outer Size:597*313*308(mm) Inner Size:410*244*220(mm)

Inner Box Size:597*350*335 (mm) Carton Size:720*610*355(mm)

PACKING:1PC/COLOR BOX 2PCS/CTN

QTY/20*/40*/40*HC(PCS):350/730/820

N.W/G.W(KGS):14/14.7



COOLER BOX CBP-35L

PRODUCT NAME AND TECHNICAL FEATURES

THERMOELECTRIC COOLER AND WARMER

- 1.Power:DC 12V,AC 100V-240V
- 2.Volume:35 Litre
- 3.Power consumption:60W±10%
- 4.Cooling:26-30°C below ambient temperature(25°C)
- 5.Heating:50-65°C by thermostat
- 6.Insulation:PU Foam
- 7.Equipped with long life brushless motor(30,000 hours)
- 8.Digital display,5V out put for charging phone
- 9.Trolley with wheels

Outer Size:610*320*400(mm) Inner Size:420*250*340(mm)

InnerBox Size:657*355*470mm Carton Size:675*370*485(mm)

PACKING:1PC/GIFTBOX 1PCS/CTN

QTY/20*/40*/40*HC(PCS):220/ 450/560

N.W/G.W(KGS):7.5/8.5



COOLER BOX CBP-30L-A

PRODUCT NAME AND TECHNICAL FEATURES

THERMOELECTRIC COOLER AND WARMER

- 1.Power:DC 12V,AC 100V-240V
- 2.Volume:30 Litre
- 3.Power consumption:60W±10%
- 4.Cooling:20-25°C below ambient temperature(25°C)
- 5.Heating:50-65°C by thermostat
- 6.Insulation:PU Foam
- 7.Equipped with long life brushless motor(30,000 hours)
- 8.Digital display,5V out put for charging phone

Outer Size:597*313*358(mm) Inner Size:410*244*270(mm)

Inner Box Size:608*350*386mm Carton Size:620*365*405(mm)

PACKING:1PC/GIFTBOX 1PCS/CTN

QTY/20*/40*/40*HC(PCS):300/620/700

N.W/G.W(KGS):7.5/8



COOLER BOX CBP-21L

PRODUCT NAME AND TECHNICAL FEATURES

THERMOELECTRIC AIR COOLER AND WARMER

- 1.Power:DC 12V,AC 100V-240V
- 2.Volume:21 Litre
- 3.Power consumption:48W±10%
- 4.Cooling:14-18°C below ambient temperature(25°C)
- 5.Insulation:High density PU Foam
- 6.Equipped with long life brushless motor(30,000 hours)

Size:333*375*513(mm) Inner Size:253*233*419(mm)

Inner Box Size:390*245*445mm Carton Size:500*410*460(mm)

PACKING:1PC/GIFTBOX 2PCS/CTN

QTY/20*/40*/40*HC(PCS):550/1200/1400

N.W/G.W(KGS):6/7



COOLER BOX CBP-24L

PRODUCT NAME AND TECHNICAL FEATURES

THERMOELECTRIC COOLER AND WARMER

- 1.Power:DC 12V,AC 100V-240V
- 2.Volume:24 Litre
- 3.Power consumption:48W±10%
- 4.Cooling:13-18°C below ambient temperature(25°C)
- 5.Heating:50-65°C by thermostat
- 6.Insulation:High density PU Foam
- 7.Red/green light shows hot/cold status
- 8.Equipped with long life brushless motor(30,000 hours)

Outer Size:400*300*430(mm) Inner Size:325*220*360(mm)

Inner Box Size:405*305*453 (mm) Carton Size:630*420*470(mm)

PACKING:1PC/COLOR BOX 2PCS/CTN

QTY/20*/40*/40*HC(PCS):500/1000/1100

N.W/G.W(KGS):9/10



COOLER BOX CBP-26L

PRODUCT NAME AND TECHNICAL FEATURES

THERMOELECTRIC COOLER AND WARMER

- 1.Power:DC 12V,AC 100V-240V
- 2.Volume:26 Litre
- 3.Power consumption:48W±10%
- 4.Cooling:13-18°C below ambient temperature
- 5.Heating:50-65°C by thermostat
- 6.Insulation:PU Foam
- 7.Equipped with long life brushless motor(30,000 hours)

Outer Size:410*320*420(mm) Inner Size:300*240*335(mm)

InnerBox Size:410*325*440(mm) Carton Size:670*425*455(mm)

PACKING:1PC/GIFTBOX 2PCS/CTN

QTY/20*/40*/40*HC(PCS):500/950/1050

N.W/G.W(KGS):7.2/8.2



COOLER BOX CBP-26L-A

PRODUCT NAME AND TECHNICAL FEATURES

THERMOELECTRIC COOLER AND WARMER

- 1.Power:DC 12V,AC 100V-240V
- 2.Volume:26 Litre
- 3.Power consumption:48W±10%
- 4.Cooling:13-18°C below ambient temperature
- 5.Heating:50-65°C by thermostat
- 6.Insulation:PU Foam
7. With digital display and USB 5V output.
- 8.Control panel:4 button(ON/OFF;UP;DOWN & ECO)

Outer Size:410*320*420(mm) Inner Size:300*240*335(mm)

InnerBox Size:410*325*440(mm) Carton Size:670*425*455(mm)

PACKING:1PC/GIFTBOX 2PCS/CTN

QTY/20*/40*/40*HC(PCS):500/950/1050

N.W/G.W(KGS):7.2/8.2



COOLER BOX

CBP-26L-B

PRODUCT NAME AND TECHNICAL FEATURES

THERMOELECTRIC AIR COOLER AND WARMER

- 1.Power:DC 12V,AC 100V-240V
- 2.Volume:26 Litre
- 3.Power consumption:48W±10%
- 4.Cooling:13-18°C below ambient temperature(25°C)
- 5.Heating:50-65°C by thermostat
- 6.Solid polyurethane foam

Outer Size:410*320*420(mm) Inner Size:300*240*340(mm)

InnerBox Size:410*325*440(mm) Carton Size:670*425*455(mm)

PACKING:1PC/GIFTBOX 2PCS/CTN

QTY/20*/40*/40*HC(PCS):500/950/1050

N.W/G.W(KGS):7.2/8.2



COOLER BOX

CBP-26L-C

PRODUCT NAME AND TECHNICAL FEATURES

THERMOELECTRIC AIR COOLER AND WARMER

- 1.Power:DC 12V,AC 100V-240V
- 2.Volume:26 Litre
- 3.Power consumption:48W±10%
- 4.Cooling:13-18°C below ambient temperature(25°C)
- 5.Heating:50-65°C by thermostat
- 6.Solid polyurethane foam
- 7.With digital display and USB 5V output
- 8.Control panel:4button(ON/OFF,UP,DOWN&ECO)

Outer Size:410*320*420(mm) Inner Size:300*240*340(mm)

InnerBox Size:410*325*440(mm) Carton Size:670*425*455(mm)

PACKING:1PC/GIFTBOX 2PCS/CTN

QTY/20*/40*/40*HC(PCS):500/950/1050

N.W/G.W(KGS):7.2/8.2



COOLER BOX

CBP-26L-D

PRODUCT NAME AND TECHNICAL FEATURES

THERMOELECTRIC AIR COOLER AND WARMER

- 1.Power:DC 12V,AC 100V-240V
- 2.Volume:26 Litre
- 3.Power consumption:48W±10%
- 4..Cooling:13-18°C below ambient temperature(25°C)
- 5.Heating:50-65°C by thermostat
- 6.Insulation:PU FOAM
- 7.Equipped with long life brushless motor(30,000 hours)

Outer Size:410*320*420(mm) Inner Size:300*240*340(mm)

InnerBox Size:410*325*440(mm) Carton Size:670*425*455(mm)

PACKING:1PC/GIFTBOX 2PCS/CTN

QTY/20*/40*/40*HC(PCS):500/950/1050

N.W/G.W(KGS):7.2/8.2



COOLER BOX

CBP-26L-E

PRODUCT NAME AND TECHNICAL FEATURES

- 1.Power:DC 12V,AC 100V-240V
- 2.Volume:26 Litre
- 3.Power consumption:48W±10%
- 4..Cooling:13-18°C below ambient temperature(25°C)
- 5.Heating:50-65°C by thermostat
- 6.Solid polyurethane foam
- 7.With digital display and USB 5V output
- 8.Control panel:4button(ON/OFF,UP,DOWN&ECO)

Outer Size:410*320*430(mm) Inner Size:300*240*340(mm)

InnerBox Size:410*325*440(mm) Carton Size:670*425*455(mm)

PACKING:1PC/GIFTBOX 2PCS/CTN

QTY/20*/40*/40*HC(PCS):500/950/1050

N.W/G.W(KGS):7.2/8.2



COOLER BOX

CBP-26L-F

PRODUCT NAME AND TECHNICAL FEATURES

THERMOELECTRIC AIR COOLER AND WARMER

- 1.Power:DC 12V,AC 100V-240V
- 2.Volume:26 Litre
- 3.Power consumption:48W±10%
- 4..Cooling:13-18°C below ambient temperature(25°C)
- 5.Heating:50-65°C by thermostat
- 6.Solid polyurethane foam
- 7.Control panel:4 button(ON/OFF,UP,DOWN&ECO)

Outer Size:410*320*430(mm) Inner Size:300*240*340(mm)

InnerBox Size:410*325*440(mm) Carton Size:670*425*455(mm)

PACKING:1PC/GIFTBOX 2PCS/CTN

QTY/20*/40*/40*HC(PCS):500/950/1050

N.W/G.W(KGS):7.2/8.2



COOLER BOX

CBP-26L-G

PRODUCT NAME AND TECHNICAL FEATURES

THERMOELECTRIC AIR COOLER AND WARMER

- 1.Power:DC 12V,AC 100V-240V
- 2.Volume:26 Litre
- 3.Power consumption:48W±10%
- 4..Cooling:13-18°C below ambient temperature(25°C)
- 5.Heating:50-65°C by thermostat
- 6.Solid polyurethane foam
- 7.With digital display and USB 5V output
- 8.Control panel:4 button(ON/OFF,UP,DOWN&ECO)

Outer Size:410*320*420(mm) Inner Size:300*240*340(mm)

InnerBox Size:410*325*440(mm) Carton Size:670*425*455(mm)

PACKING:1PC/GIFTBOX 2PCS/CTN

QTY/20*/40*/40*HC(PCS):500/950/1050

N.W/G.W(KGS):7.2/8.2



COOLER BOX

CBP-29L

PRODUCT NAME AND TECHNICAL FEATURES

THERMOELECTRIC AIR COOLER AND WARMER

- 1.Power:DC 12V,AC 100V-240V
- 2.Volume:29 Litre
- 3..Power consumption:48W±10%
- 4..Cooling:13-18°C below ambient temperature(25°C)
- 5.Heating:50-65°C by thermostat
- 6.Solid polyurethane foam

Outer Size:410*320*460(mm) Inner Size:300*240*350(mm)

InnerBox Size:410*335*535(mm) Carton Size:670*425*495(mm)

PACKING:1PC/GIFTBOX 2PCS/CTN

QTY/20*/40*/40*HC(PCS):400/800/920

N.W/G.W(KGS):4.1/5.74



COOLER BOX

CBP-29L-A

PRODUCT NAME AND TECHNICAL FEATURES

THERMOELECTRIC AIR COOLER AND WARMER

- 1.Power:DC 12V,AC 100V-240V
- 2.Volume:29 Litre
- 3.Power consumption:48W±10%
- 4..Cooling:13-18°C below ambient temperature(25°C)
- 5.Heating:50-65°C by thermostat
- 6.Solid polyurethane foam
- 7.With digital display and USB 5V output
- 8.Control panel:4 button(ON/OFF,UP,DOWN&ECO)

Outer Size:410*320*460(mm) Inner Size:300*240*350(mm)

InnerBox Size:410*335*535(mm) Carton Size:670*425*495(mm)

PACKING:1PC/GIFTBOX 2PCS/CTN

QTY/20*/40*/40*HC(PCS):400/800/920

N.W/G.W(KGS):4.1/5.74



COOLER BOX

CBP-29L-B

PRODUCT NAME AND TECHNICAL FEATURES

THERMOELECTRIC AIR COOLER AND WARMER

- 1.Power:DC 12V,AC 100V-240V
- 2.Volume:29 Litre
- 3.Power consumption:48W±10%
- 4.Cooling:13-18°C below ambient temperature(25°C)
- 5.Heating:50-65°C by thermostat
- 6.Solid polyurethane foam

Outer Size:410*320*460(mm) Inner Size:300*240*350(mm)

InnerBox Size:410*335*535(mm) Carton Size:670*425*495(mm)

PACKING:1PC/GIFTBOX 2PCS/CTN

QTY/20*/40*/40*HC(PCS):400/800/920

N.W/G.W(KGS):4.1/5.74



COOLER BOX

CBP-29L-C

PRODUCT NAME AND TECHNICAL FEATURES

THERMOELECTRIC AIR COOLER AND WARMER

- 1.Power:DC 12V,AC 100V-240V
- 2.Volume:26 Litre
- 3.Power consumption:48W±10%
- 4..Cooling:13-18°C below ambient temperature(25°C)
- 5.Heating:50-65°C by thermostat
- 6.Solid polyurethane foam
- 7.With digital display and USB 5V output
- 8.Control panel:4 button(ON/OFF,UP,DOWN&ECO)

Outer Size:410*320*460(mm) Inner Size:300*240*350(mm)

InnerBox Size:410*335*535(mm) Carton Size:670*425*495(mm)

PACKING:1PC/GIFTBOX 2PCS/CTN

QTY/20*/40*/40*HC(PCS):400/800/920

N.W/G.W(KGS):4.1/5.74



COOLER BOX

CBP-29L-D

PRODUCT NAME AND TECHNICAL FEATURES

THERMOELECTRIC AIR COOLER AND WARMER

- 1.Power:DC 12V,AC 100V-240V
- 2.Volume:29 Litre
- 3.Power consumption:48W±10%
- 4.Cooling:13-18°C below ambient temperature(25°C)
- 5.Heating:50-65°C by thermostat
- 6.Solid polyurethane foam

Outer Size:410*320*460(mm) Inner Size:300*240*350(mm)

InnerBox Size:410*335*535(mm) Carton Size:670*425*495(mm)

PACKING:1PC/GIFTBOX 2PCS/CTN

QTY/20*/40*/40*HC(PCS):400/800/920

N.W/G.W(KGS):4.1/5.74



COOLER BOX

CBP-29L-E

PRODUCT NAME AND TECHNICAL FEATURES

THERMOELECTRIC AIR COOLER AND WARMER

- 1.Power:DC 12V,AC 100V-240V
- 2.Volume:29 Litre
- 3.Power consumption:48W±10%
- 4.Cooling:13-18°C below ambient temperature(25°C)
- 5.Heating:50-65°C by thermostat
- 6.Solid polyurethane foam
- 7.With digital display and USB 5V output
- 8.Control panel:4 button(ON/OFF,UP,DOWN&ECO)

Outer Size:410*320*460(mm) Inner Size:300*240*350(mm)

InnerBox Size:410*335*535(mm) Carton Size:670*425*495(mm)

PACKING:1PC/GIFTBOX 2PCS/CTN

QTY/20*/40*/40*HC(PCS):400/800/920

N.W/G.W(KGS):4.1/5.74



COOLER BOX CBP-50L

PRODUCT NAME AND TECHNICAL FEATURES

THERMOELECTRIC AIR COOLER AND WARMER

- 1.Power:DC 12V,AC 100V-240V
- 2.Volume:50 Litre
- 3.Power consumption:48W±10%
- 4.Cooling:13-15°C below ambient temperature(25°C)
- 5.Heating:50-65°C by thermostat
- 6.Solid polyurethane foam(PU FOAM)
- 7.Red/green light shows hot/cold status
- 8.Equipped with long life brushless motor(30,000 hours)

Outer Size:600*410*420(mm) Inner Size:495*335*330(mm)

Inner Box Size:615*420*435 (mm) Carton Size:630*435*450(mm)

PACKING:1PC/GIFTBOX 1PCS/CTN

QTY/20*/40*/40*HC(PCS):220/450/550

N.W/G.W(KGS):8/9



COOLER BOX CBP-50L-A

PRODUCT NAME AND TECHNICAL FEATURES

COMPRESSOR FRIDGE

1. Power:DC 12V and AC 220V-240V
2. Volume:45 Litre
- 3.Power consumption: 70W±10%
- 4.Cooling: 20°C below ambient temperature(25°C)
5. Heating: 50-65°C by thermostat
6. Solid polyurethane foam (CFC-free)
7. Red/green light shows hot/cold status
- 8.Equipped with long life brushless motor (30,000 hours)

Outer Size: 680*410*390(mm) Inner Size:540*300*300(mm)

Inner Box Size:690*415*410mm Carton Size:710*425*430 (mm)

PACKING:1PC/GIFTBOX

QTY/20*/40*/40*HC(PCS):210/435/510

N.W/G.W(KGS):8.0/8.7



COOLER BOX CBP-50L-C

PRODUCT NAME AND TECHNICAL FEATURES

THERMOELECTRIC COOLER AND WARMER(Double Cooling)

- 1.Power:DC 12V,AC 100V-240V
- 2.Volume:50 Litre
- 3.Power consumption:60W±10%
- 4.Cooling:22~28°C below ambient temp.(25°C),and lowest to -3°C
- 5.Heating:50-65°C by thermostat
- 6.Insulation:PU Foam
- 7.Equipped with long life brushless motor(30,000 hours)
- 8.Trolley with wheels

Outer Size:524*586*421(mm) Inner Size:303*477*347(mm)

InnerBox Size:635*465*565 (mm) Carton Size:650*480*580 (mm)

PACKING:1PC/GIFTBOX 1PCS/CTN

QTY/20*/40*/40*HC(PCS):150/300/360

N.W/G.W(KGS):9.5/10



COOLER BOX CBP-50L-D

PRODUCT NAME AND TECHNICAL FEATURES

THERMOELECTRIC COOLER AND WARMER(Double Cooling)

- 1.Power:DC 12V,AC 100V-240V
- 2.Volume:50 Litre
- 3.Power consumption:60W±10%
- 4.Cooling:22~28°C below ambient temp.(25°C),and lowest to -3°C
- 5.Heating:50-65°C by thermostat
- 6.Insulation:PU Foam
- 7.Equipped with long life brushless motor(30,000 hours)
- 8.Digital display with control panel
- 9.Trolley with wheels

Outer Size:524*586*421(mm) Inner Size:303*477*347(mm)

InnerBox Size:635*465*565 (mm) Carton Size:650*480*580 (mm)

PACKING:1PC/GIFTBOX 1PCS/CTN

QTY/20*/40*/40*HC(PCS):150/300/360

N.W/G.W(KGS):9.5/10



COOLER BOX CBP-33L

PRODUCT NAME AND TECHNICAL FEATURES

THERMOELECTRIC COOLER AND WARMER

1. Power:DC 12V and AC 220V-240V or AC100-120V
2. Volume:32 Litre
- 3.Power consumption: 48W±10%
- 4.Cooling: Down to 8°C at 25°C ambient
5. Heating: 50-65°C by thermostat
6. Solid polyurethane foam
7. With digital display and USB 5V output.
- 8.Control panel:4 button(ON/OFF;UP;DOWN & ECO)
9. Blue tooth speaker

Outer Size:452*354*455(mm) Inner Size:363.6*261.1*355.5(mm)

Inner Box Size:452*355*457(mm) Carton Size:470*370*470(mm)

PACKING:1PC/GIFTBOX 1PCS/CTN

QTY/20*/40*/40*HC(PCS):240/500/860

N.W/G.W(KGS):5.5/6.5



COOLER BOX CBP-33L-A

PRODUCT NAME AND TECHNICAL FEATURES

THERMOELECTRIC COOLER AND WARMER

1. Power:DC 12V and AC 220V-240V or AC100-120V
2. Volume:32 Litre
- 3.Power consumption: 48W±10%
- 4.Cooling: Down to 8°C at 25°C ambient
5. Heating: 50-65°C by thermostat
6. Solid polyurethane foam

Outer Size:452*354*455(mm) Inner Size:364*261.1*355.5(mm)

Inner Box Size:452*355*457(mm) Carton Size:470*370*470(mm)

PACKING:1PC/GIFTBOX 1PCS/CTN

QTY/20*/40*/40*HC(PCS):240/500/860

N.W/G.W(KGS):5.5/6.5



COMPRESSOR FRIDGE

APPLY TO

CAR, OUTDOOR, CAMPING, FAMILY PARTY, FISHING, CAMPING



COMPRESSOR FRIDGE CBP-C-25L

PRODUCT NAME AND TECHNICAL FEATURES

COMPRESSOR FRIDGE

- 1.Power:DC 12V-24V,AC 100V-240V(With adapter)
- 2.Volume:23 Litre
- 3.Power consumption:55W±10%
- 4.Cooling:Down-20°C
- 5.Solid polyurethane foam(PU FOAM)
- 6.Digital temperature display and control temperature panel
- 7.Battery protection:3 level battery monitor
- 8.Adustable for ECO and HH modes

Outer Size:583*365*344(mm) Inner Size:283*284*267(mmm)

Inner Box Size:672*448*432mm Carton Size:690*465*450 (mm)

PACKING:1PC/GIFTBOX 1PCS/CTN

QTY/20*/40*/40*HC(PCS):170/380/450

N.W/G.W(KGS):13/14



COMPRESSOR FRIDGE CBP-C-35L

PRODUCT NAME AND TECHNICAL FEATURES

THERMOELECTRIC COOLER AND WARMER

- 1.Power:DC 12V-24V,AC 100V-240V(With adapter)
- 2.Volume:32 Litre
- 3.Power consumption:55W±10%
- 4.Cooling:Down-20°C
- 5.Solid polyurethane foam(PU FOAM)
- 6.Digital temperature display and control temperature panel
- 7.Battery protection:3 level battery monitor
- 8.Adustable for ECO and HH modes

Outer Size:583*365*434(mm) Inner Size:283*284*357(mm)

Inner Box Size:672*448*522 (mm) Carton Size:690*465*540 (mm)

PACKING:1PC/GIFTBOX 1PCS/CTN

QTY/20*/40*/40*HC(PCS):150/320/380

N.W/G.W(KGS):14/15



COMPRESSOR FRIDGE CFP-35L

PRODUCT NAME AND TECHNICAL FEATURES

COMPRESSOR COOLER

1. Power:DC 12V -24V AC 100-240V
2. Volume:35 Litre
- 3.Power consumption: 55W±10%
- 4.Cooling: -18 Degree
5. Solid polyurethane foam (PU FOAM)
- 6.digital temperatru display and control temperature pannel
- 7.ECO function

Inner Size:370*284*300(mm) Outer Size: 620*344*375(mm)

Carton Size:670*395*445(mm)

PACKING:1PC/CTN

QTY/20*/40*/40*HC(PCS):230/490/570

N.W/G.W(KGS):11.5/12.5



COMPRESSOR FRIDGE CFP-45L

PRODUCT NAME AND TECHNICAL FEATURES

COMPRESSOR COOLER

1. Power:DC 12V -24V AC 100-240V
2. Volume:45 Litre
- 3.Power consumption: 55W±10%
- 4.Cooling: -18 Degree
- 5.Solid polyurethane foam (PU FOAM)
- 6.digital temperatru display and control temperature pannel
- 7.ECO function

Inner Size:373*284*407(mm) Outer Size: 622*346*480(mm)

Carton Size:670*395*550(mm)

PACKING:1PC/CTN

QTY/20*/40*/40*HC(PCS):190/380/450

N.W/G.W(KGS):12.5/13.5



COMPRESSOR FRIDGE CFP-20L

PRODUCT NAME AND TECHNICAL FEATURES

COMPRESSOR COOLER

1. Power:DC 12V -24V AC 100-240V
2. Volume:20 Litre
- 3.Power consumption: 48W±10%
- 4.Cooling: -18 Degree
5. Solid polyurethane foam (PU FOAM)
- 6.digital temperatrue display and control temperature pannel
- 7.removable storage case

Inner Size:330*267*311 Outer Size: 438*365*405

Carton Size:505*435*470



COMPRESSOR FRIDGE CFP-30L

PRODUCT NAME AND TECHNICAL FEATURES

COMPRESSOR COOLER

1. Power:DC 12V -24V AC 100-240V
2. Volume:30 Litre
- 3.Power consumption: 48W±10%
- 4.Cooling: -18 Degree
- 5.Solid polyurethane foam (PU FOAM)
- 6.digital temperatrue display and control temperature pannel
- 7.removable storage case

Inner Size:330*267*411 Outer Size: 438*365*505

Carton Size:505*435*570



NEW



KITCHEN GARBAGE COOLER MFA-3.5L-G

1. Power:DC 12V and AC 220V
 2. Volume:3.5Litre
 - 3.Power consumption: 48W±10%
 - 4.Cooling: Down to 3°C at 20°C ambient
 5. Suitable size for room placement
 - 6.insulation:high density EPS
- Outer Size:210*H267 (mm)
Inner Size:153mm*H180(mm)



MASK THERMOMETER COLD / HEAT

1. Power:AC 220-240V/AC 100-120V
2. Volume: A mask
3. Power consumption:30W
- 4.Temperature range:6~45°C
- 5.Display temperature, adjustable temperature



THERMOELECTRIC COOLER CBA-6L-A

- 1.ower:AC 100-240V (Adaptor)
- 2.Volume:6 Litre
- 3.Power consumption:20W±10%
- 4.Cooling 15-18°C below ambient temp.(25°C)
- 5.insulation:high density EPS



BSCI



ICS



ISO9001



RoHS



LFGB



FDA



CB



CE



ETL



PSE



KC